

FLEXICODE

High-quality coding for individual packaging





FLEXICODE

compact . fast . direct


- > Intermittent mode and continuous mode selectable
- > Compact dimensions, multitude of attachment options
- > Problem-free network integration
- > Freely programmable printing system
- > Transfer ribbon prior warning
- > Quick access to real-time data
- > Synchronisation with packaging machines
- > Optimal user comfort and low maintenance
- > Low noise emission

Flexicode

The solution for fast direct printing

Flexicode is the ideal marking system when variable data is to be printed directly onto foil without first having to print a label. This direct print module is a budget-oriented entry-level system focused on important and basic functions.

Flexicode works with digital thermal transfer technology. This method stands for exceptionally good print quality and maximum reliability. Flexicode's easy maintenance, supported by a multitude of diagnostic functions, is an additional advantage.

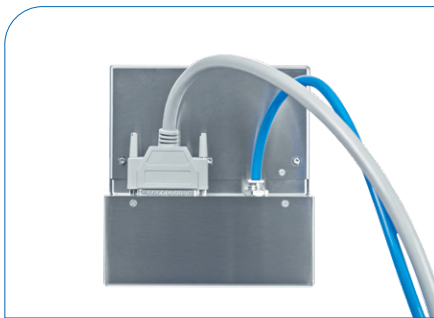


Ingenious casing design

The logical, well considered casing design offers a multitude of cable guiding options. Where space is extremely tight cable can be run up, down, behind and even to the side. All connections are arranged easily accessible and a clear wiring is ensured.



Minimal operating costs

Flexicode delivers high quality marking on flexible packaging at low operating costs. Due to its great flexibility and the extraordinary length of the transfer ribbon, standstill times are reduced to a minimum when making production changes and replacing the transfer ribbon. The result is a lower consumption of materials - and thus lower costs.

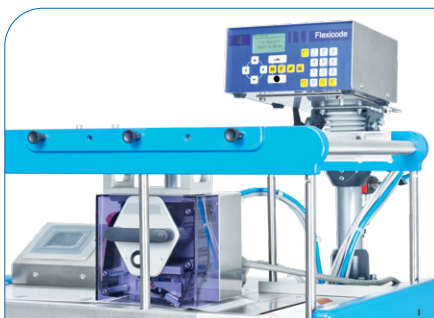

First class adaptability

Flexicode provides all of the spatial prerequisites for integration in existing production and packaging systems: It is exceptionally small, lightweight and offers a multitude of attachment options. With variable bracket systems and support fittings, it can be adapted for every office - and this can be done fully flexibly and with a quick setup time.




Unbeatable flexibility


Variable data such as date, time, batch number and bar codes are printed in high print quality directly onto the packaging foil or cardboard. Change of coding takes place either fully automatically or with the push of a button and therefore requires minimum setup times. Easy operation in conjunction with a high degree of reliability ensures maximum production times.

Flexicode 53

Printing	
Print width	max 53 mm
Print length continuous mode intermittent mode	max 3000 mm max 40 mm
Print speed	50 ... 400 mm/s
Back speed	max 600 mm/s (intermittent mode only)
Bracket passage width	customized
Print resolution	300 dpi
Printhead	Corner Type
Dimensions (width x height x depth)	
Print mechanics w/o bracket system with bracket system	190 x 180 x 208 mm dependent on passage width
Control unit	242 x 117 x 220 mm
Connecting cable set to mechanics	2.5 m
Weight	
Print mechanics	6.0 kg
Electronics with cable	3.7 kg
Acoustic Emission (distance 1 m)	
Average sound power level	69 dB(A)
Transfer Ribbons	
Ink	outside or inside
Roll diameter	max 82 mm
Core diameter	25.4 mm / 1"
Length	max 450 m
Interfaces	
Serial	RS-232C (max 115,200 baud)
Parallel	Centronics (SPP)
USB	2.0 High Speed Slave
Ethernet	10/100 Base T, LPD, RawIP-Printing, DHCP, HTTP, FTP
2 x USB Master	connection for external USB keyboard and memory stick
Connection Values	
Pneumatic connection	6 bar dry and oil-free
Nominal voltage	230 V AC / 50-60 Hz 1,5 A 115 V AC / 50-60 Hz 3 A (option)
Fuse values	2x T4A 250 V
Operating Conditions	
Temperature	5 ... 40 °C
Relative humidity	max 80 % (non-condensing)
Fonts	
Font types	6 bitmap fonts 8 vector fonts/TrueType fonts 6 proportional fonts more fonts on demand
Character sets	Windows 1250 to 1257, DOS 437, 850, 852, 857 all West and East European, Latin, Cyrillic, Greek and Arabic characters are supported more character sets on demand
Bitmap fonts	size in width and height 0.8 – 5.6 zoom 2 – 9 orientation 0°, 90°, 180°, 270°
Vector fonts/TrueType fonts	6 BITSTREAM® fonts size in width and height 1 – 99 mm variable zoom orientation 360° in steps of 90°
Font attributes	dependent on font type – bold, italic, inverse, vertical
Character spacing	variable
Bar Codes	
1D bar codes	2/5 Industrial, Codabar, Code 128, Code 128A, Code 128B, Code 2/5 interleaved, Code 39, Code 39 extended, Code 93, EAN 13, EAN 8, EAN Add-on, GS1-128, Identcode, ITF 14, Leitcode, Pharmacode, PLANET (Postal Alpha Numeric Encoding Technique), PostNet, PZN 7, PZN 8, UPC-A, UPC-E, USPS Intelligent Mail
2D bar codes	Aztec Code, CODABLOCK F, DataMatrix, GS1 DataMatrix, MAXICODE, PDF 417, QR Code
GS1 bar codes	GS1 DataBar Expanded, GS1 DataBar Limited, GS1 DataBar Omnidirectional, GS1 DataBar Stacked, GS1 DataBar Stacked Omnidirectional, GS1 DataBar Truncated
all bar codes are variable in height, module width and ratio orientation 0°, 90°, 180°, 270° check digit and human readable line optional	



Left version . Continuous mode

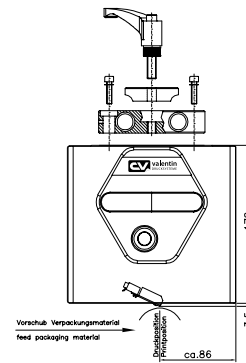[illegible]

Technical drawings of the Flexicode control unit. The left drawing is a front view showing a 242mm wide unit with a 116.5mm high keypad area and a 123mm high display area. The keypad has 16 buttons labeled 1-16. The right drawing is a side view showing a 221mm wide unit with two mounting holes, each with a 1.30mm diameter. The mounting holes are 25mm apart.

- Flexicode is as well available as right version (mirrored)
- all measurements in mm
- subject to technical changes

Ribbon
save



Touch
panel



Config
Tool



Labelstar
Office



Loftware



Local retailer

Branches:

Sales office Bavaria

Marienplatz 8a . 83043 Bad Aibling
Phone +49 8061 3498888 . rstreck@carl-valentin.de

Sales office Spain

Calle historiador Vedia 14 5ªB . 15004 La Coruña
Phone +34 881 103163 . Mobile +34 609022241 . mlano@carl-valentin.es

Sales office Switzerland

Swiss Business Haus . Moosackerstraße 75 . 8105 Regensdorf
Phone +41 61 9739641 . Mobile +41 79 7448436 . info@carl-valentin.ch



Carl Valentin GmbH
Neckarstraße 78–86 u. 94
78056 Villingen-Schwenningen
Phone +49 7720 9712-0
info@carl-valentin.de . www.carl-valentin.de

