


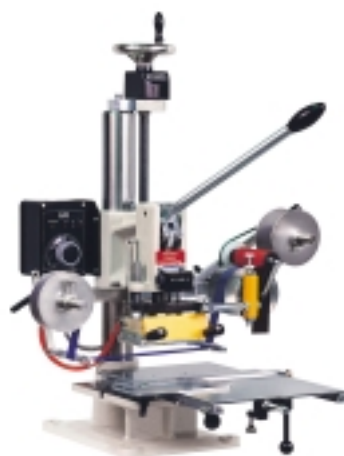

technical dates

	Model GEBA 1/A - Hand-Operated Hot Stamping Machine	Model GEBA 1/F - Hand-Operated Hot Stamping Machine for titles	Model GEBA 7, Execution C + D - Hand-Operated Hot Stamping Machine
Construction:	one-column pillar, table model	C-pillar, table model	C-pillar
Drive:	hand-operated	hand-operated	hand-operated
Stroke of plunger:	28,5 mm	28,5 mm	50 mm
Stamping area:	70 x 90 mm	70 x 90 mm	Execution C: 150 x 210 mm Execution D: 210 x 300 mm
Stamping pressure adjustable:	0-800 kp (8 kN)	0-600 kp (6 kN)	0-4000 kp (40 kN)
Daylight (adjustment of height):	0-180 mm	0-96 mm	0-30 mm
Throat (middle of stamping plate to column/bow):	110 mm	320 mm	175 mm
Temperature regulation:	electronical	electronical	electronically
Working table:	221 mm wide x 230 mm deep, slidable to all sides, fine adjustment form the front	620 x 620 mm, stationary	468 mm wide x 310 mm deep, slidable to all four sides
Foil feeding system:	mechanical, 1-fold from left to right side, with foil rewinding system	hand-operated, running from left to right side with rewinding device	mechanical, 1-fold from left to right, with foil rewinding system
Heating efficiency		320 watts	Execution C: 1400 W Execution D: 2280 W
Standard accessories:	Die-holding plate without locking frame Stroke counter mechanical Height measurement unit, mechanical Galvanized execution	Electrically heated hot-stamping plate 70 x 90 mm Adjustable table limit stop Electrically heated type box for a clamping length of 110 mm for 6,55 and 23,56 mm high types	Die-holding plate without locking frame Die-holding plate with locking frame for 23,56 mm high types Mechanical stroke counter
Colour of machine:			light grey RAL 7035 with yellow RAL 1021
Voltage:	1 phase, 230 volts A.C. 50 Hz, viz. according to voltage of buyer's country	1 phase, 230 volts A.C. 50 Hz, viz. according to voltage of buyer's country	1 phase, 230 V A.C., 50 Hz or as per voltage of customer's country